

elumen8

Stabilize G1

User Manual



Order code: BRAC042

WARNING

FOR YOUR OWN SAFETY, PLEASE READ THIS USER MANUAL CAREFULLY BEFORE USING THIS PRODUCT.



- Before your initial start-up, please make sure that there is no damage caused during transportation.
- Should there be any damage, consult your dealer and do not use the equipment.
- To maintain the equipment in good working condition and to ensure safe operation, it is necessary for the user to follow the safety instructions and warning notes written in this manual.
- Please note that damages caused by user modifications to this equipment are not subject to warranty.

IMPORTANT:

The manufacturer will not accept liability for any resulting damages caused by the non-observance of this manual or any unauthorised modification to the equipment.

INCORRECT INSTALLATION CAN CAUSE SERIOUS INJURY/DAMAGE.

- Never remove warning or informative labels from the product.
- Do not modify the product.
- This product may ONLY be installed by skilled persons who have had prior training and experience and are able to identify risks and avoid hazards.
- During installation and de-installation, skilled persons MUST wear PPE (personal protective equipment) in compliance with site or national regulations.
- Do not exceed the WLL (working load limit) as indicated on the product and in this manual.
- When this product is used with other accessories, ensure the WLL of each part is not exceeded.

INSPECT THE PRODUCT BEFORE & AFTER EACH USE

- Do not use this product if the product or parts of the product show signs of damage/excessive wear.
- Examine this bracket before and after each use for any visual defects. If a fault is found, mark the bracket and remove it from service straight away.
- The bracket should be examined for damage, cracks and corrosion, the welds should also be inspected for signs of cracks and corrosion.

OPERATING DETERMINATIONS



- If this equipment is operated in any other way, than those described in this manual, the product may suffer damage and the warranty becomes void.
- Do not endanger your own safety and the safety of others!
- This product is intended for professional use, incorrect installation or use can cause serious damage to people and/or property.
- Do not modify the product, this will render the warranty void.
- Use this product in environments with an ambient temperature of between - 40° C and 100° C.


Stabilize G1

The Elumen8 Stabilize G1 is a heavy-duty ground anchor designed for medium to hard terrain such as gardens with solid dirt and small rocks. The ground anchor can support loads of up to 55kg and is ideal for outdoor events, festivals, and installations. The Stabilize G1 features a central M12 hole along with two elongated holes either side of the bracket for fixture mounting. Simply use your foot to push the anchor into the ground and mount your fixture securely.

- Manufactured from Galvanised Steel
- Black powder coated finish
- Suitable for medium to hard terrain
- Three M12 mounting holes

Specifications	Stabilize G1
WLL (kg)	55kg
Material	Galvanised Steel
Finish	Black powder coating
Ambient Temperature	- 40° C to 100° C
Dimensions (H x W x D)	400 x 215 x 50mm
Weight (bracket only)	1.3kg
Fixing type	Ground anchor
Order code	BRAC042

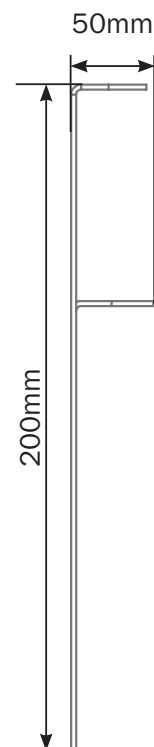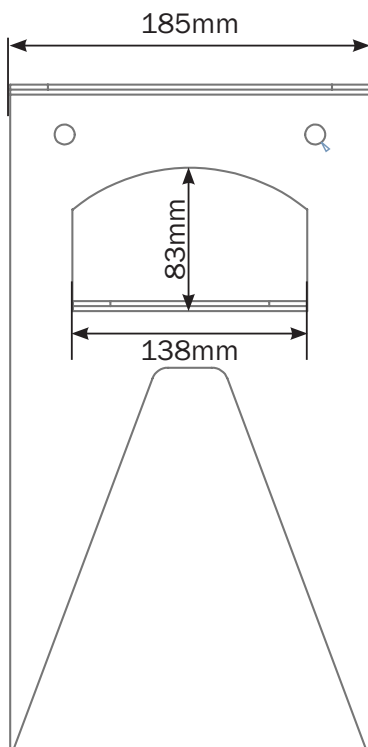

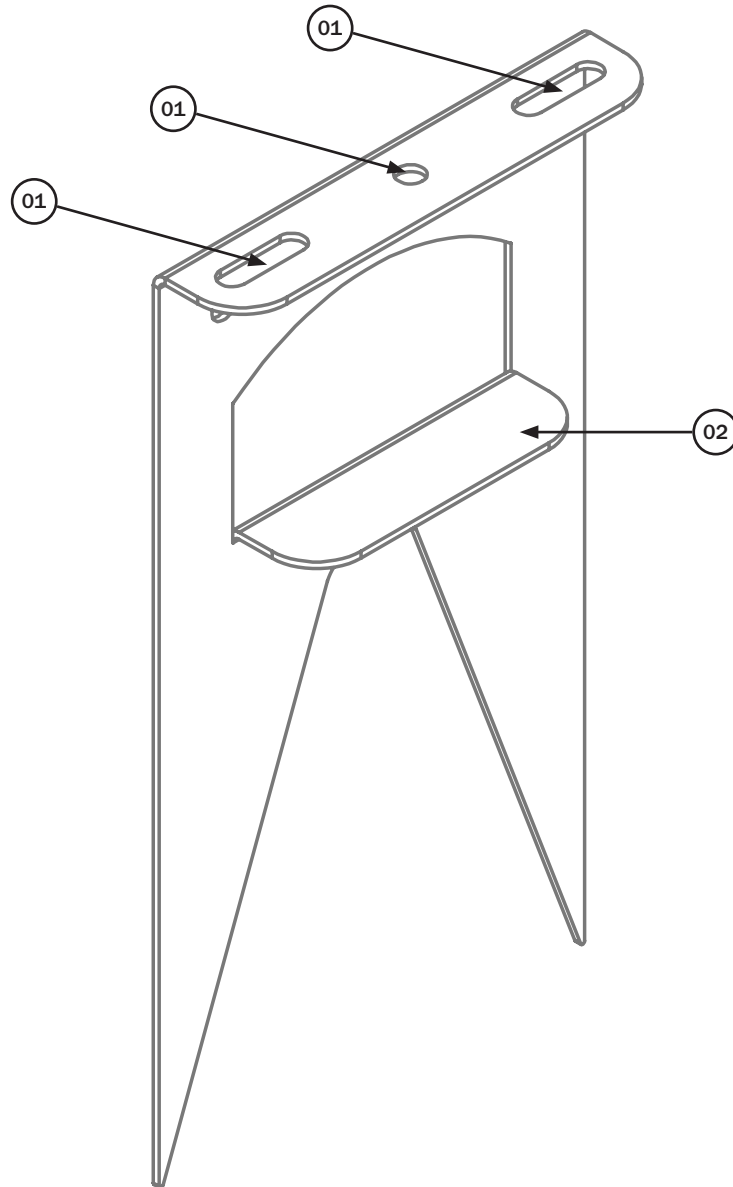

01 - M12 mounting points

02 - Foot plate

In the box:
1 x Stabilize G1

Mounting Fixtures on the Bracket:

Dynamic loads such as moving equipment or suspended components must be considered when determining whether this bracket is suitable for the intended installation.

This bracket may **ONLY** be installed by skilled persons who have received appropriate training and have sufficient experience to identify risks and prevent hazards.


Always ensure the fixtures being mounted do not exceed the WLL.

During installation and de-installation, skilled persons **MUST** wear appropriate PPE (Personal Protective Equipment) in accordance with site rules or national regulations.

This bracket is designed to be ground mounted.

To mount the bracket please follow the below instructions:

1. Position the bracket against the mounting point of the fixture to be installed.
2. Insert an appropriate M12 fixing bolt through the bracket and the fixture mounting point.
3. Secure the fixing using a suitable washer and nut. Ensure the fixing is tightened correctly.

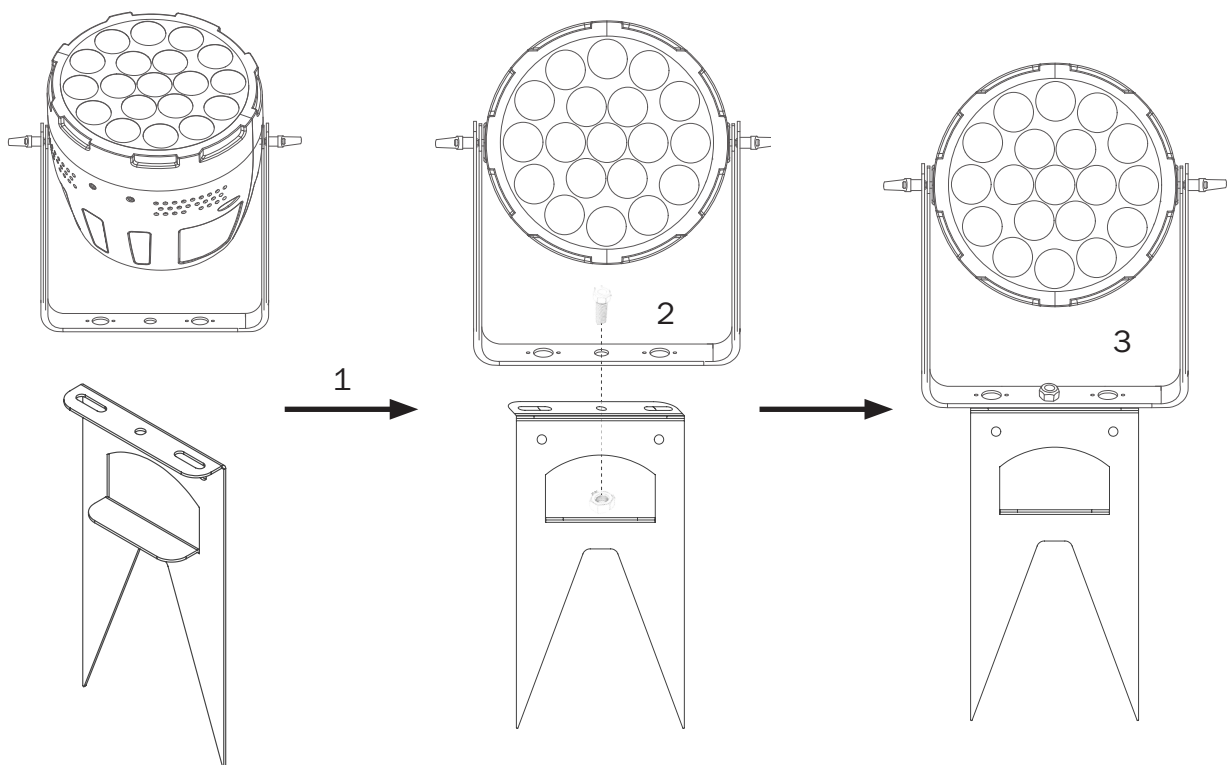

To unmount the bracket please follow the below instructions:

1. Remove the fixing bolt securing the fixture to the bracket.
2. Remove the fixture.
2. Remove the bracket from the ground by pulling it vertically out of the installation surface.

